

**HIGH RESOLUTION GEOLOGIC MAPPING OF THE INNER CONTINENTAL SHELF: NAHANT TO GLOUCESTER MASSACHUSETTS**

Sheet 2. Shaded-relief topography of the seafloor (grayscale).

By  
Walter A. Barnhardt, Brian D. Andrews, and Bradford Butman

**HIGH RESOLUTION GEOLOGIC MAPPING OF THE INNER CONTINENTAL SHELF: NAHANT TO GLOUCESTER MASSACHUSETTS**

U.S. Geological Survey Open-File Report 2005-1293  
Map Sheet 2 : Shaded-relief topography of the seafloor (grayscale)

**Introduction**

A series of five map sheets shows the seafloor topography and geology of the inner continental shelf between Nahant and Gloucester, Massachusetts including Salem Sound and parts of western Massachusetts Bay. This map (sheet 2) shows seafloor topography in gray scale, shaded-relief view, with selected topographic contours overprinted in light gray. Sheet 1 shows shaded-relief topography in color, sheet 3 shows grayscale backscatter intensity, sheet 4 shows shaded-relief topography colored by backscatter intensity, and sheet 5 shows seafloor geology. These maps are produced as part of a cooperative effort by the U.S. Geological Survey (USGS) and the Massachusetts Office of Coastal Zone Management (CZM) to systematically map the seafloor geology offshore of Massachusetts. This map sheet is accompanied by a more extensive report on DVD-ROM that presents a description of the data collection, processing, and analysis procedures used to create these maps. The DVD-ROM also includes copies of all data layers in GIS format, and the original data used to validate the geologic interpretations.

The geophysical data presented in these five map sheets were collected on two research cruises conducted in September-October 2003 and April-May 2004. The shaded-relief imagery in this map was created by vertically exaggerating the seafloor topography five times and then artificially illuminating the relief by a light source positioned 35° above the horizon from an azimuth of 045°. Topographic features, such as submarine ridges and hills, are enhanced by strong illumination on northeast-facing slopes and by shadows cast on southwest-facing slopes. The hillshading accentuates small features that could not be effectively shown by contours alone at this scale. Bathymetric contours are shown at 10 m intervals and, for clarity, have been simplified or omitted in areas of complex topography.

Some features in the image are artifacts of data collection and environmental conditions. They include small high and low, and unusual-looking patterns oriented parallel or perpendicular to survey tracklines, which were run northeast-southwest in the map area. For example, the striping in the southwest corner of the map results from choppy sea state during that part of the survey. Areas that could not be surveyed because they were too shallow (less than 5 m deep) are shown in gray. The two strips running northeast-southwest parallel to the ship track, one in Salem Sound and one in the southwest part of the survey area, are areas of no data.

Additional data are included on this map to show the regional topography in areas adjacent to the new survey. To the southeast, offshore of the new survey, seafloor topography in shaded-relief view is shown at a resolution of 6 m/pixel based on data presented by Butman and others (2004). To the northwest, offshore of the new survey, seafloor topography in shaded-relief view is shown at a resolution of 30 m/pixel from the NOAA/NOS estuarine bathymetry database (NOAA, 1998). The onshore topography is from the Massachusetts Geographic Information System (MassGIS, 2005) displayed at a resolution of 25m/pixel.

**Data and Methods**

Mapping of the seafloor was carried out in the nearshore region between the 5 and 40 meter isobaths. Approximately 134 km<sup>2</sup> of the inner shelf were mapped using interferometric sonar (seafloor topography), sidescan sonar (backscatter intensity), and chirp seismic reflection profiling (sediment thickness). The three mapping systems were simultaneously deployed from the R/V *Rafael*, a 25-ft research vessel outfitted for mapping in shallow water.

The topographic data (i.e., water depth) on this map were collected by a pole-mounted SEA Submetric 2000 series interferometric sonar that operates at a frequency of 224 kHz. The system consists of two transducers that collect depth data in a continuous swath on either side of the vessel. The width of the swath is generally 7-10 times the water depth. Under optimal conditions in water depths of 15 m, for example, interferometric sonar can scan up to 75 m to each side of the ship's track, or 150 m total. Survey lines were spaced 100 m apart to ensure overlap of adjacent swaths, and obtain 100% coverage of the seafloor. Depth data were processed and gridded using Linux-based SwathEdit software (UNB, 2005). The bathymetric data have a vertical resolution of approximately 1% of water depth and a final pixel size of 5 meters.

Navigation for the survey vessel and all data collection used Real-Time Kinematic Global Positioning System (RTK-GPS) from a base station established by USGS near the Eastern Point Lighthouse in Gloucester. All survey data were collected in Universal Transverse Mercator (UTM) coordinate system, Zone 19 using the WGS84 Geoid Model. Tidal offsets were calculated using the RTK-GPS elevations and applied to soundings data during post processing. Tidal datum was reduced as Mean Sea Level (MSL) and was later reduced to Mean Lower Low Water (MLLW) by subtracting 1.4 meters.

Samples of the surficial sediments and bottom photographs were used to validate interpretations of the remotely-sensed depth and backscatter data. Bottom samples and/or photographs of the seafloor were obtained at 100 stations on a cruise conducted in May 2004 immediately following geophysical data acquisition. Stations were selected to sample areas of differing characteristics, based on a qualitative examination of the backscatter and topographic data. At each station, the survey vessel deployed a USGS Sea Bed Observation and Sampling System (SEABOSS; Valentine and others, 2000) and drilled over the seafloor. Continuous video and still photographs were recorded along the drift track. At each station about 5 minutes of video and 5 bottom photographs were obtained. Sediment samples were collected at 56 of the 100 stations where the bottom was not covered with boulders, rock, or ledge. Sediment grabs were later analyzed for grain size using the methods outlined in Poppe and others (2000).

**Features**

Maps depicting topography and surficial materials on the inner continental shelf play an important role in understanding the region's geologic history and the ongoing processes that have shaped the seafloor. Igneous and metamorphic rocks spanning millions of years of Earth history control the overall geometry of the coast and inner continental shelf (Zen et al., 1983). Erosion resistant intrusive igneous rock rugged coastal headlands and some of the submarine shoals. Glaciation and relative sea-level change are the most important processes to act on the region, and have produced a heterogeneous mix of bottom types on the inner continental shelf.

Rock outcrops and coarse-grained glacial sediment form the rugged, irregular topography that characterizes the seafloor in much of the study area. Deposits of glacial till and outwash partially mantle the rocks with a wide range of particle sizes from fine-grained mud to large boulders. Glaciers produced a prominent series of boulder-covered ridges or moraines southwest of Marblehead Neck, in shallow water just outside the entrance to Salem Sound. These relic features are arcuate and curve seaward in planform, with each moraine marking a former position of the ice-sheet margin as it progressively retreated across the region at the end of the Ice Age. Sandy sediment fills several small, closed depressions in the vicinity of the moraines, which probably represent kettle that formed by glacial drift and have been modified by erosion. An elongate valley with rocky walls extends offshore from Salem Sound, passing between Little Misery and Bakers Islands. The valley exhibits a pattern of tributaries and a main channel that were probably eroded by the ancestral Danvers River when relative sea level was lower than today.

No major rivers presently deliver significant amounts of sediment to the area, so reworking of existing deposits has largely determined the observed distribution of bottom sediment. Modern processes interact with bedrock and glacial deposits to create the sandy beaches and other coastal landforms extant along the present shoreline. Sandy sediment derived from reworked glacial sediment, has also accumulated on the surface of broad, gently sloping areas of seafloor in Nahant Bay in the southwestern part of the map, and offshore of Manchester in the northeastern part of the map. Thick deposits of muddy sediment primarily occur in Salem Sound, where islands and shoals at the estuary mouth provide shelter from large waves out of the northeast and create a depositional environment. More details on the geologic framework and evolution of the region are found in the report that accompanies this map.

The narrow trough or furrow-like feature crossing Salem Sound was created by construction of a high-pressure pipeline that carries natural gas from Canada to the Boston area. The 30-inch diameter steel pipe is buried below the seafloor. It passes east of Childrens Island and out into deeper water, turning southwest towards Boston.

**Acknowledgements**

Funding for this research was provided by the Coastal and Marine Geology Program of the U.S. Geological Survey (USGS) and the Massachusetts Office of Coastal Zone Management (CZM). We wish to thank Susan Snow-Cotter and Tony Wilbur of CZM for their encouragement and support of offshore research. Assistance in the field was provided by Seth Adelman, Dawn Blackwood, Ilya Boyanovitch, Bill Danforth, Jane Denny, Dave Foster, Barry Inwa, and Chuck Worley. We also thank Jane Denny, William Danforth, and Erika Hammar-Klose for their help in processing the large amounts of acoustic data. Larry Poppe and his staff ran the laboratory analyses of sediment texture. Michael Blazewicz and the Ar/Marine working group assisted with the database structure.

**References**

Butman, B., Valentine, P.C., Danforth, W.W., Hayes, L., Sennett, L.A., and Middleton, T.J. 2004. Shaded relief, backscatter intensity and seafloor topography of Massachusetts Bay and the Stellwagen Bank region, offshore of Boston, Massachusetts. U.S. Geological Survey Geologic Investigation Map I-2734, scale 1:125,000, 2 sheets. Available online at <http://pubs.usgs.gov/map/i2734/>.

MassGIS, 2005. Massachusetts Geographic Information System, Statewide Digital Elevation Model (1:5000) February 2005. Available online at [http://www.mass.gov/mgis/img\\_slev6k.htm](http://www.mass.gov/mgis/img_slev6k.htm).


NOAA, 1998. National Oceanic and Atmospheric Administration, National Ocean Survey, Special Projects Office, 1998, Estuarine Bathymetry, NOS Special Projects website at <http://spserver.nos.noaa.gov/16080/bathy/index.html>.

Poppe, L.J. and Polloni, C.F., eds., 2000. USGS east-coast sediment analysis: Procedures, database and georeferenced displays. U.S. Geological Survey Open-File Report 00-358, DVD-ROM. Available online at <http://pubs.usgs.gov/openfile/of00-358/>.

UNB, 2005. SwathEdit - sonar analysis software developed and maintained by University of New Brunswick, Department of Geodesy and Geomatics, Ocean Mapping Group, Fredericton, New Brunswick, Canada.

Valentine, P.C., Blackwood, D. B., and Parolaki, K.F. 2000. Seabed observation and sampling system. U.S. Geological Survey Fact Sheet FS-142-00. Available online at <http://pubs.usgs.gov/fs/142-00/fs142-00.pdf>.

Zen, E-an, Goldsmith, R., Ratcliffe, N.M., Robinson, P., and Stanley, R.S., 1983. Bedrock geologic map of Massachusetts: U.S. Geological Survey, Washington D.C., scale 1:250,000, 3 sheets.

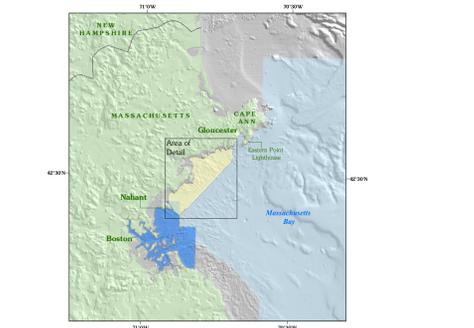

Map of other adjacent sea floor mapping projects. Area to the south in blue is Boston Harbor and approaches, area offshore in light blue is Western Massachusetts Bay (Butman and others 2004).

